




AK 114 VERTICAL

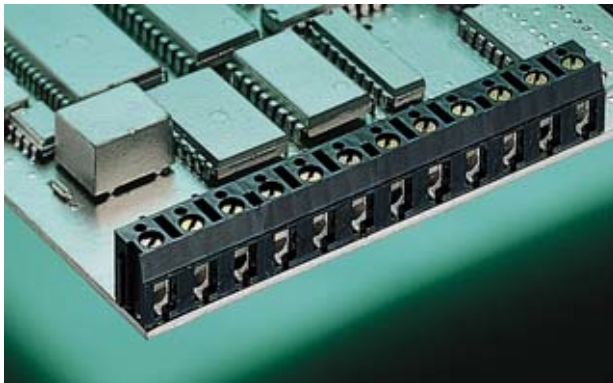

AK 114/.. DS - 7,5 - V - grey

**2-12 poles, Spacing 7,5 mm
insert required no. of poles ..**

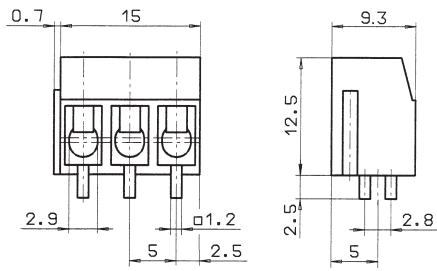

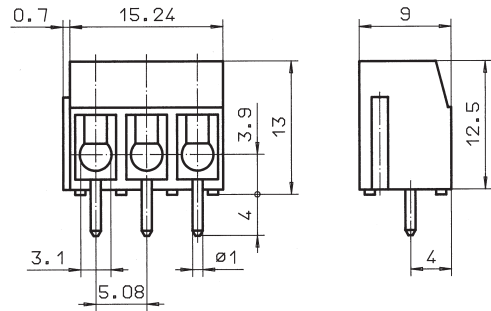
AKZ 120 VERTICAL



AKZ 120/.. DS - 5,08 - V - grey

**2-12 poles, Spacing 5,08 mm
insert required no. of poles ..**

Ratings:

			
	UL 1059	CSA 22.2 No. 158	EN 60998
Rated voltage	300 V	300 V	500 V
Rated current	15 A	15 A	32 A (T60)
Wire Size	AWG 22-12	AWG 22-12	4,0 mm ²
Test voltage			3,0 kV
Rated Torque / Screw Size			0,8 Nm/M3
Max. Rated Cross Section			
Single Wire (solid)			4,0 mm ²
Stranded Wire (flexible)			2,5 mm ²
Stranded wire with Ferrules			1,5 mm ²




Dimensions

Spacing	7,5 mm
PCB hole diameter x pitch	2,0 mm x 2,8 mm
Stripped length	7,0 mm

Materials

Insulating material	PA
Flammability class	UL94 V-0
Temperature range	-30°C/+105°C
Terminal block	CuZn
Wire guard	stainless steel
Colour	
grey	RAL 7016

Ratings:

			
	UL 1059	CSA 22.2 No. 158	EN 60998
Rated voltage	300 V	300 V	250 V
Rated current	15 A	15 A	24 A (T60)
Wire Size	AWG 22-14	AWG 22-14	2,5 mm ²
Test voltage			2,0 kV
Rated Torque / Screw Size			0,5 Nm/M3
Max. Rated Cross Section			
Single Wire (solid)			2,5 mm ²
Stranded Wire (flexible)			1,5 mm ²
Stranded wire with Ferrules			1,5 mm ²

Dimensions

Spacing	5,08 mm
PCB hole diameter	1,3 mm
Stripped length	7,0 mm

Materials

Insulating material	PA
Flammability class	UL94 V-0
Temperature range	-30°C/+105°C
Terminal block	CuZn
Wire guard	stainless steel
Colour	
grey	RAL 7016